


CONSTRUCTION NOTES

1. CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
2. CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
3. CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
4. CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
5. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
6. CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
7. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
8. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH THIS TYPE OF WORK.
9. IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
10. CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
11. CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

1 MATERIALS PLAN (OVERALL)

SCALE: 1" = 40'-0" @ 24"x36" (FULL SIZE) | 1" = 80'-0" @ 12"x18" (HALF SIZE)

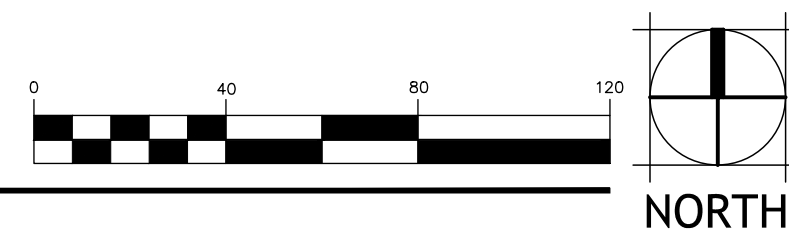

B W A BERNARDO | WILLS
ARCHITECTS PC



Project No: 22-02-032
Drawn by:
Date: 01-17-24

L1.0

B W A BERNARDO | WILLS
ARCHITECTS PC

Liberty Lake Regional Park - Phase I
Spokane County Project No. P13648



3707 S. Zephyr Road
Liberty Lake, WA 99019

100% BID SET
Construction Drawings
LANDSCAPE MATERIALS
PLAN (OVERALL)

153 SOUTH JEFFERSON SPOKANE WASHINGTON 99201 509.838.4511 509.838.4605 WWW.BERNARDOWILLS.COM

COPYRIGHT BERNARDO WILLS ARCHITECTS PC 2013



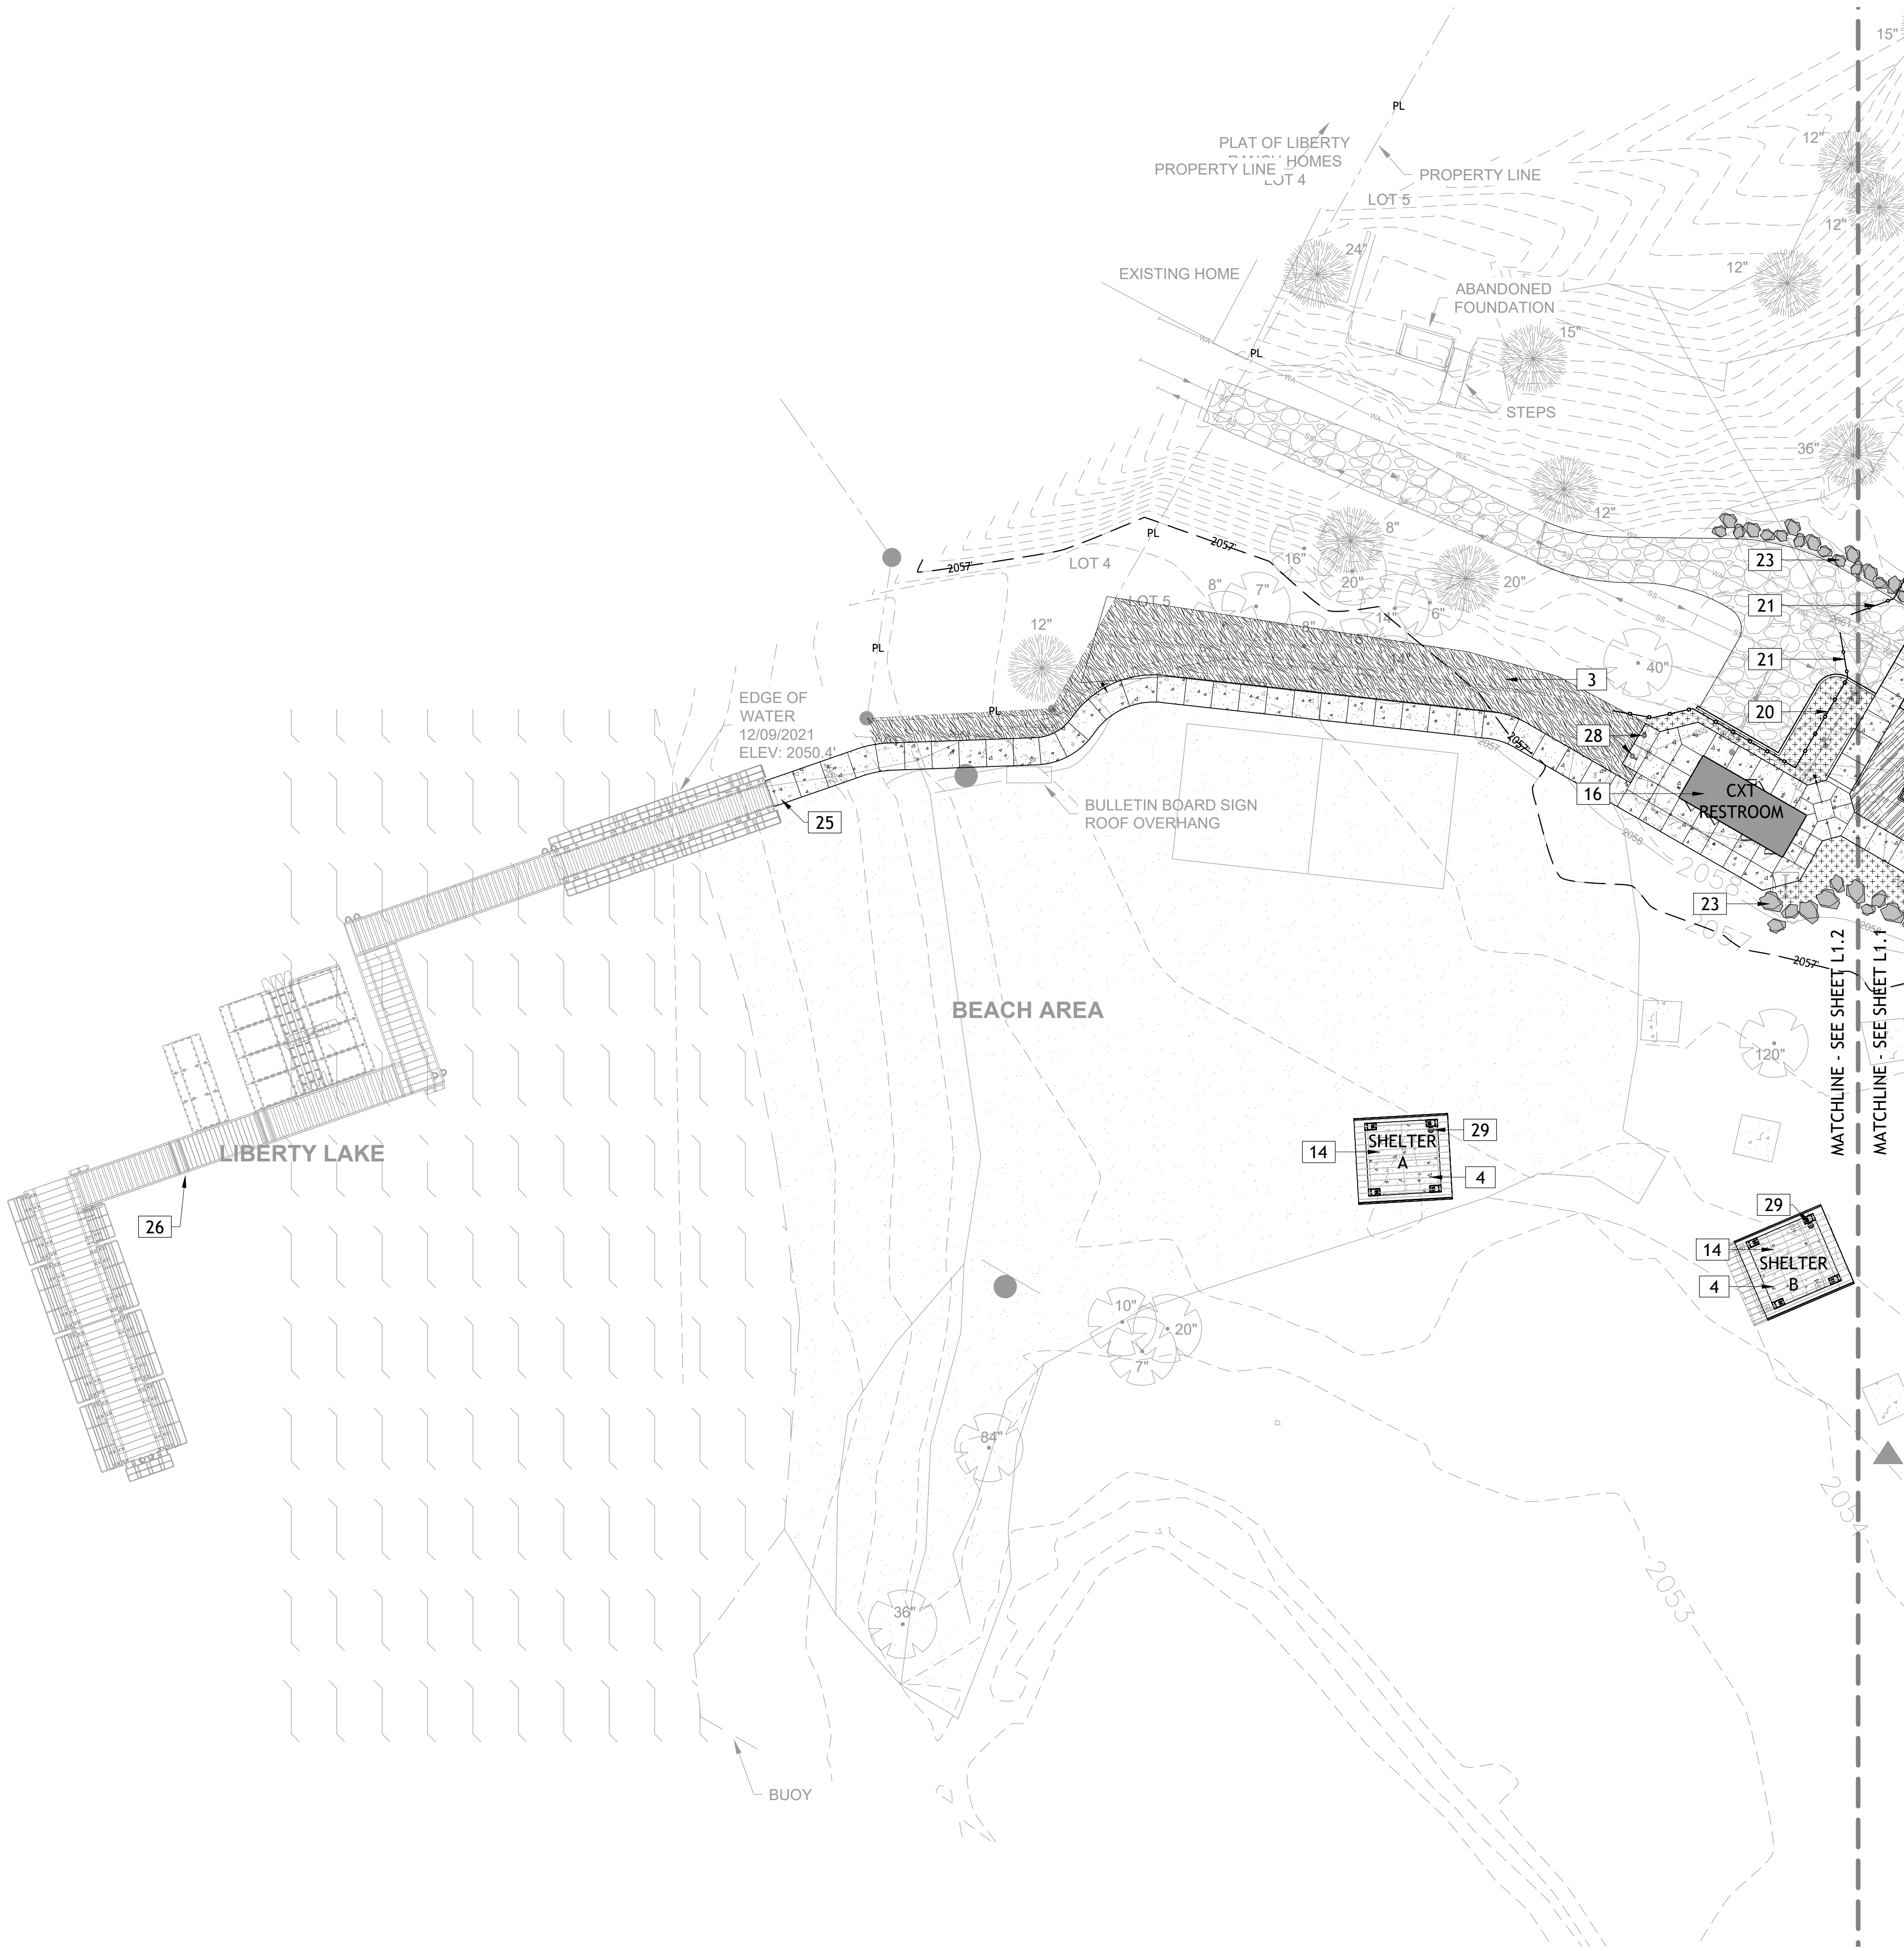

CONSTRUCTION NOTES

1. CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
2. CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
3. CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
4. CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
5. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
6. CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
7. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
8. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILAR WITH THIS TYPE OF WORK.
9. IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
10. CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
11. CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

LANDSCAPE BOULDER NOTES


BOULDER SIZING GUIDE		
BOULDER SIZE	AVG. DIMENSION	% PERCENT OF TOTAL COUNT
2-MAN	18 TO 28 INCHES	10%
3-MAN	28 TO 36 INCHES	45%
4-MAN	36 TO 48 INCHES	45%


LANDSCAPE BOULDERS, TYP. VARIOUS SIZES, REFER TO BOULDER SIZING GUIDE. BOULDERS SHALL BE ANGULAR GRANITE WITH TEXTURED SURFACE. SUBMIT BOULDER SOURCE AND MINIMUM OF (3) SAMPLE PHOTOS TO LANDSCAPE ARCHITECT FOR APPROVAL. EXCAVATED OR BLASTED ROCK WILL NOT BE ALLOWED ON THIS PROJECT. SEE DETAILS #04 & 05/SHEET L5.0.

MATERIALS LEGEND

SYMBOL	DESCRIPTION
	1 NEW LANDSCAPE BEDS (12" DEPTH ONSITE TOPSOIL AMENDED W/ 40% IMPORTED COMPOST (BY VOLUME) OVERHEAD SPRAY IRRIGATION 2" DEPTH DARK FINES BARK MULCH)
	2 NEW DRYLAND HYDROSEED (NO IRRIGATION) - SEE PLANTING PLANS FOR SEED MIX
	3 WETLAND MITIGATION AREA - SEE PLANTING PLANS & SHORELINE IMPACT ASSESSMENT FOR ADDITIONAL INFORMATION (SHOWN FOR COORDINATION PURPOSES ONLY, MITIGATION BY OWNER, NOT-IN-CONTRACT)
	4 NEW CONCRETE FLATWORK - SEE CIVIL & ARCHITECTURAL SHEETS
	5 GRAVEL SURFACING (IMPORTED 6" DEPTH MINIMUM 5/8" - MINUS CRUSHED BASALT AGGREGATE SURFACING)
	10 GRANITE LANDSCAPE BOULDERS, 2-4 MAN TYPICAL - SEE BOULDER SIZING GUIDE SHEET L1.0 & DETAILS #07 & 08/SHEET L5.0
	11 NATURAL STONE RISERS, TYP. - SEE DETAIL #12/SHEET L5.0
	13 ENTRY MONUMENT SIGN - SEE DETAILS #01 & 02/SHEET L5.2
	14 NEW SMALL GROUP SHELTER - SEE DETAIL SHEETS A1.1 & S1.0 FOR ADDITIONAL INFORMATION
	15 NEW LARGE GROUP SHELTER - SEE DETAIL SHEETS A2.1 & S1.0 FOR ADDITIONAL INFORMATION
	16 NEW CXT RESTROOM BUILDING
	17 REMOVABLE BOLLARD, TYP. (MAGLIN MT8500-B2 SERIES BOLLARDS, 4.5IN. DIAMETER, H.S. STEEL TUBE CONSTRUCTION, COLOR SHALL BE YELLOW GLOSS)
	18 NEW 2-RAIL ROUND-RAIL CEDAR FENCE TO MATCH EXISTING ON-SITE FENCE, TYP.
	19 PORT-A-POTTY RESTROOM SCREEN - 3-SIDED 8FT. X 8FT. SQUARE REVAMP PANEL FENCE SYSTEM, PANEL DESIGN SHALL BE "BLADES" AS PROVIDED BY WWW.REVAMPPANELS.COM. COLOR SHALL BE DARK GREEN. (CONTRACTOR SHALL SUBMIT SHOP DRAWINGS & COLOR SAMPLE FOR APPROVAL)
	20 SEPARATION FENCE TO MATCH EXISTING TYPE & HEIGHT (CONTRACTOR TO FIELD VERIFY)
	21 NEW BARRIER GATE FOR ADJACENT NEIGHBOR'S ACCESS - SEE DETAIL #03/SHEET L5.2
	22 NEW PUMP STATION SURROUND & SCREENING (8FT. HT. BLACK VINYL-COATED CHAIN LINK FENCE BLACK PRIVACY SLATS ALL SIDES 10FT. CLEAR OPENING DOUBLE SWING GATES W/ PRIVACY SLATS PROVIDE OPTION FOR FUTURE PADLOCK (BY OWNER))
	23 BOULDER RETAINING WALLS - SEE CIVIL SHEETS & DETAILS #09 & 10/SHEET L5.0 FOR ADDITIONAL INFORMATION
	24 NEW ASPHALT PAVING & CURBS - SEE CIVIL SHEETS
	25 NEW CONCRETE ABUTMENT - SEE DETAILS #05/SHEET L5.2 FOR ADDITIONAL INFORMATION
	26 NEW DOCK (NOT-IN-CONTRACT) - SHOWN FOR INFORMATIONAL PURPOSES ONLY
	27 STANDARD COUNTY INFORMATION KIOSK - SEE DETAIL #04/SHEET L5.2
	28 NEW EXTERIOR SHOWER & FOOT WASH, TYP (2) - 8IN. DIAMETER ADA COMPLIANT OUTDOOR SHOWER & FOOTWASH W/ GRAB BARS, MANUFACTURED BY WSF WILLOUGHBY STAINLESS FOUNTAINS. MODEL NUMBER WODS-ADA STAINLESS STEEL SERIES TYPE 316 STAINLESS STEEL, WITH 4 BOLT MOUNTING KIT, ONE FOUNTAIN SHALL HAVE A RECESSED HOSE BIBB W/LOCK DOOR.
	29 FIRE EXTINGUISHERS SHALL BE PROVIDED AND INSTALLED BY CONTRACTOR FOR ALL SHADE STRUCTURES (3 TOTAL)
	33 ALTERNATE NO. #01 PARKING LOT LIMIT LINE

* ALL QUANTITIES PROVIDED SHALL BE CONFIRMED BY CONTRACTOR AND ARE SHOWN FOR REFERENCE ONLY. IN THE CASE OF A DISCREPANCY BETWEEN THE SCHEDULE AND PLAN, THE PLAN LOCATION(S) SHALL DICTATE QUANTITY.*

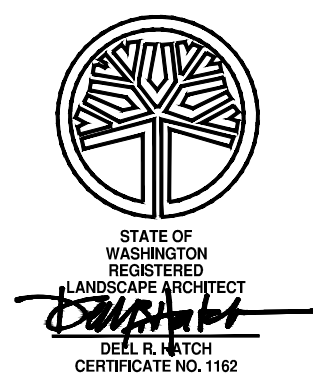

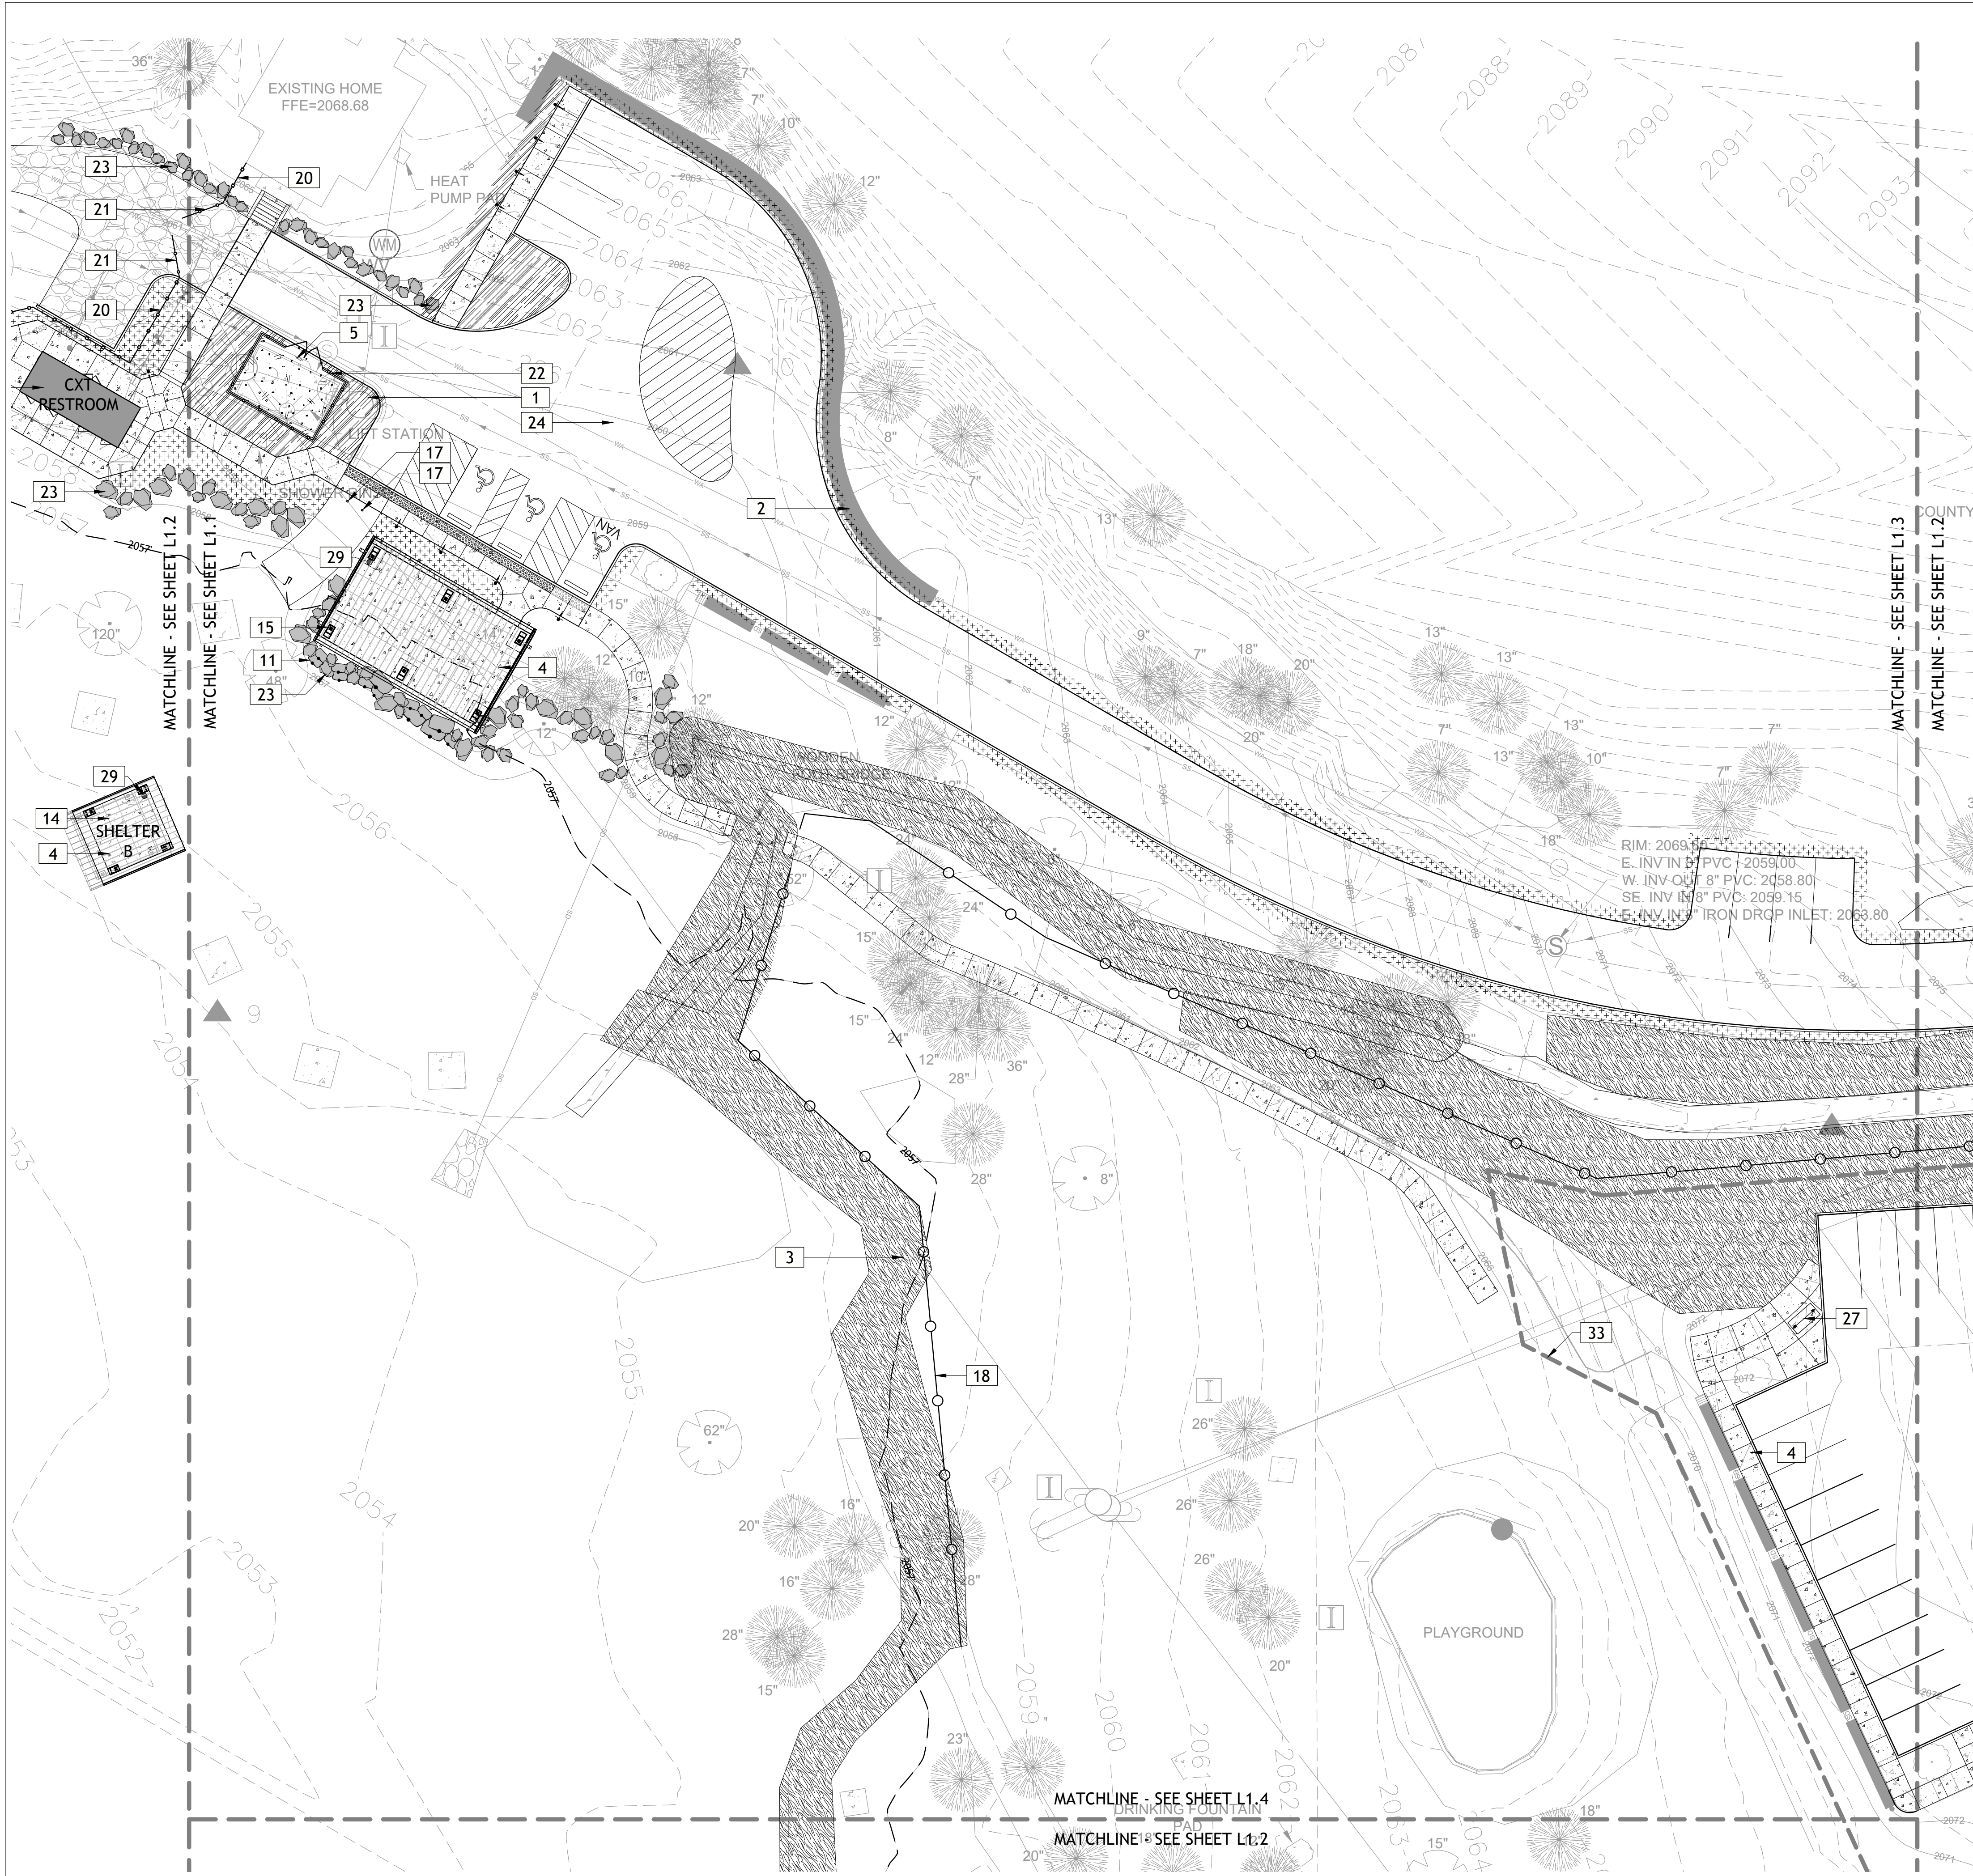

CONSTRUCTION NOTES

1. CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
2. CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
3. CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
4. CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
5. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
6. CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
7. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
8. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH THIS TYPE OF WORK.
9. IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
10. CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
11. CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

LANDSCAPE BOULDER NOTES

BOULDER SIZING GUIDE		
BOULDER SIZE	AVG. DIMENSION	% PERCENT OF TOTAL COUNT
2-MAN	18 TO 28 INCHES	10%
3-MAN	28 TO 36 INCHES	45%
4-MAN	36 TO 48 INCHES	45%



LANDSCAPE BOULDERS, TYP. VARIOUS SIZES, REFER TO BOULDER SIZING GUIDE. BOULDERS SHALL BE ANGULAR GRANITE WITH TEXTURED SURFACE. SUBMIT BOULDER SOURCE AND MINIMUM OF (3) SAMPLE PHOTOS TO LANDSCAPE ARCHITECT FOR APPROVAL. EXCAVATED OR BLASTED ROCK WILL NOT BE ALLOWED ON THIS PROJECT. SEE DETAILS #04 & 05/SHEET L5.0.

MATERIALS LEGEND

SYMBOL	DESCRIPTION
	1 NEW LANDSCAPE BEDS (12" DEPTH ONSITE TOPSOIL AMENDED W/ 40% IMPORTED COMPOST (BY VOLUME) OVERHEAD SPRAY IRRIGATION 2" DEPTH DARK FINES BARK MULCH)
	2 NEW DRYLAND HYDROSEED (NO IRRIGATION) - SEE PLANTING PLANS FOR SEED MIX
	3 WETLAND MITIGATION AREA - SEE PLANTING PLANS & SHORELINE IMPACT ASSESSMENT FOR ADDITIONAL INFORMATION (SHOWN FOR COORDINATION PURPOSES ONLY, MITIGATION BY OWNER, NOT-IN-CONTRACT)
	4 NEW CONCRETE FLATWORK - SEE CIVIL & ARCHITECTURAL SHEETS
	5 GRAVEL SURFACING (IMPORTED 6" DEPTH MINIMUM 5/8" - MINUS CRUSHED BASALT AGGREGATE SURFACING)
SYMBOL	DESCRIPTION
	10 GRANITE LANDSCAPE BOULDERS, 2-4 MAN TYPICAL - SEE BOULDER SIZING GUIDE SHEET L1.0 & DETAILS #07 & 08/SHEET L5.0
	11 NATURAL STONE RISERS, TYP. - SEE DETAIL #12/SHEET L5.0
	13 ENTRY MONUMENT SIGN - SEE DETAILS #01 & 02/SHEET L5.2
	14 NEW SMALL GROUP SHELTER - SEE DETAIL SHEETS A1.1 & S1.0 FOR ADDITIONAL INFORMATION
	15 NEW LARGE GROUP SHELTER - SEE DETAIL SHEETS A2.1 & S1.0 FOR ADDITIONAL INFORMATION
	16 NEW CXT RESTROOM BUILDING
	17 REMOVABLE BOLLARD, TYP. (MAGLIN MT8500-B2 SERIES BOLLARDS, 4.5IN. DIAMETER, H.S. STEEL TUBE CONSTRUCTION, COLOR SHALL BE YELLOW GLOSS)
	18 NEW 2-RAIL ROUND-RAIL CEDAR FENCE TO MATCH EXISTING ON-SITE FENCE, TYP.
	19 PORT-A-POTTY RESTROOM SCREEN - 3-SIDED 8FT. X 8FT. SQUARE REVAMP PANEL FENCE SYSTEM, PANEL DESIGN SHALL BE "BLADES" AS PROVIDED BY WWW.REVAMPPANELS.COM. COLOR SHALL BE DARK GREEN. (CONTRACTOR SHALL SUBMIT SHOP DRAWINGS & COLOR SAMPLE FOR APPROVAL)
	20 SEPARATION FENCE TO MATCH EXISTING TYPE & HEIGHT (CONTRACTOR TO FIELD VERIFY)
	21 NEW BARRIER GATE FOR ADJACENT NEIGHBOR'S ACCESS - SEE DETAIL #03/SHEET L5.2
	22 NEW PUMP STATION SURROUND & SCREENING (8FT. HT. BLACK VINYL-COATED CHAIN LINK FENCE BLACK PRIVACY SLATS ALL SIDES 10FT. CLEAR OPENING DOUBLE SWING GATES W/ PRIVACY SLATS PROVIDE OPTION FOR FUTURE PADLOCK (BY OWNER))
	23 BOULDER RETAINING WALLS - SEE CIVIL SHEETS & DETAILS #09 & 10/SHEET L5.0 FOR ADDITIONAL INFORMATION
	24 NEW ASPHALT PAVING & CURBS - SEE CIVIL SHEETS
	25 NEW CONCRETE ABUTMENT - SEE DETAILS #05/SHEET L5.2 FOR ADDITIONAL INFORMATION
	26 NEW DOCK (NOT-IN-CONTRACT) - SHOWN FOR INFORMATIONAL PURPOSES ONLY
	27 STANDARD COUNTY INFORMATION KIOSK - SEE DETAIL #04/SHEET L5.2
	28 NEW EXTERIOR SHOWER & FOOT WASH, TYP (2) - 8IN. DIAMETER ADA COMPLIANT OUTDOOR SHOWER & FOOTWASH W/ GRAB BARS, MANUFACTURED BY WSF WILLOUGHBY STAINLESS FOUNTAINS. MODEL NUMBER WODS-ADA STAINLESS STEEL SERIES TYPE 316 STAINLESS STEEL, WITH 4 BOLT MOUNTING KIT, ONE FOUNTAIN SHALL HAVE A RECESSED HOSE BIBB W/LOCK DOOR.
	29 FIRE EXTINGUISHERS SHALL BE PROVIDED AND INSTALLED BY CONTRACTOR FOR ALL SHADE STRUCTURES (3 TOTAL)
	33 ALTERNATE NO. #01 PARKING LOT LIMIT LINE

* ALL QUANTITIES PROVIDED SHALL BE CONFIRMED BY CONTRACTOR AND ARE SHOWN FOR REFERENCE ONLY. IN THE CASE OF A DISCREPANCY BETWEEN THE SCHEDULE AND PLAN, THE PLAN LOCATION(S) SHALL DICTATE QUANTITY.*



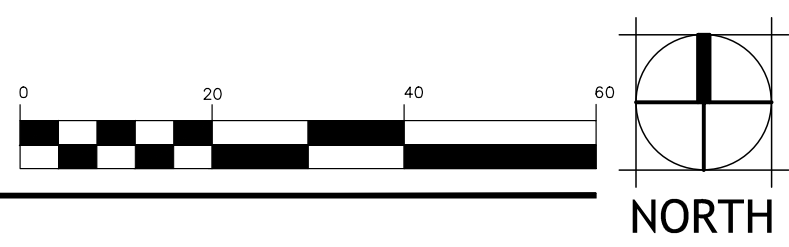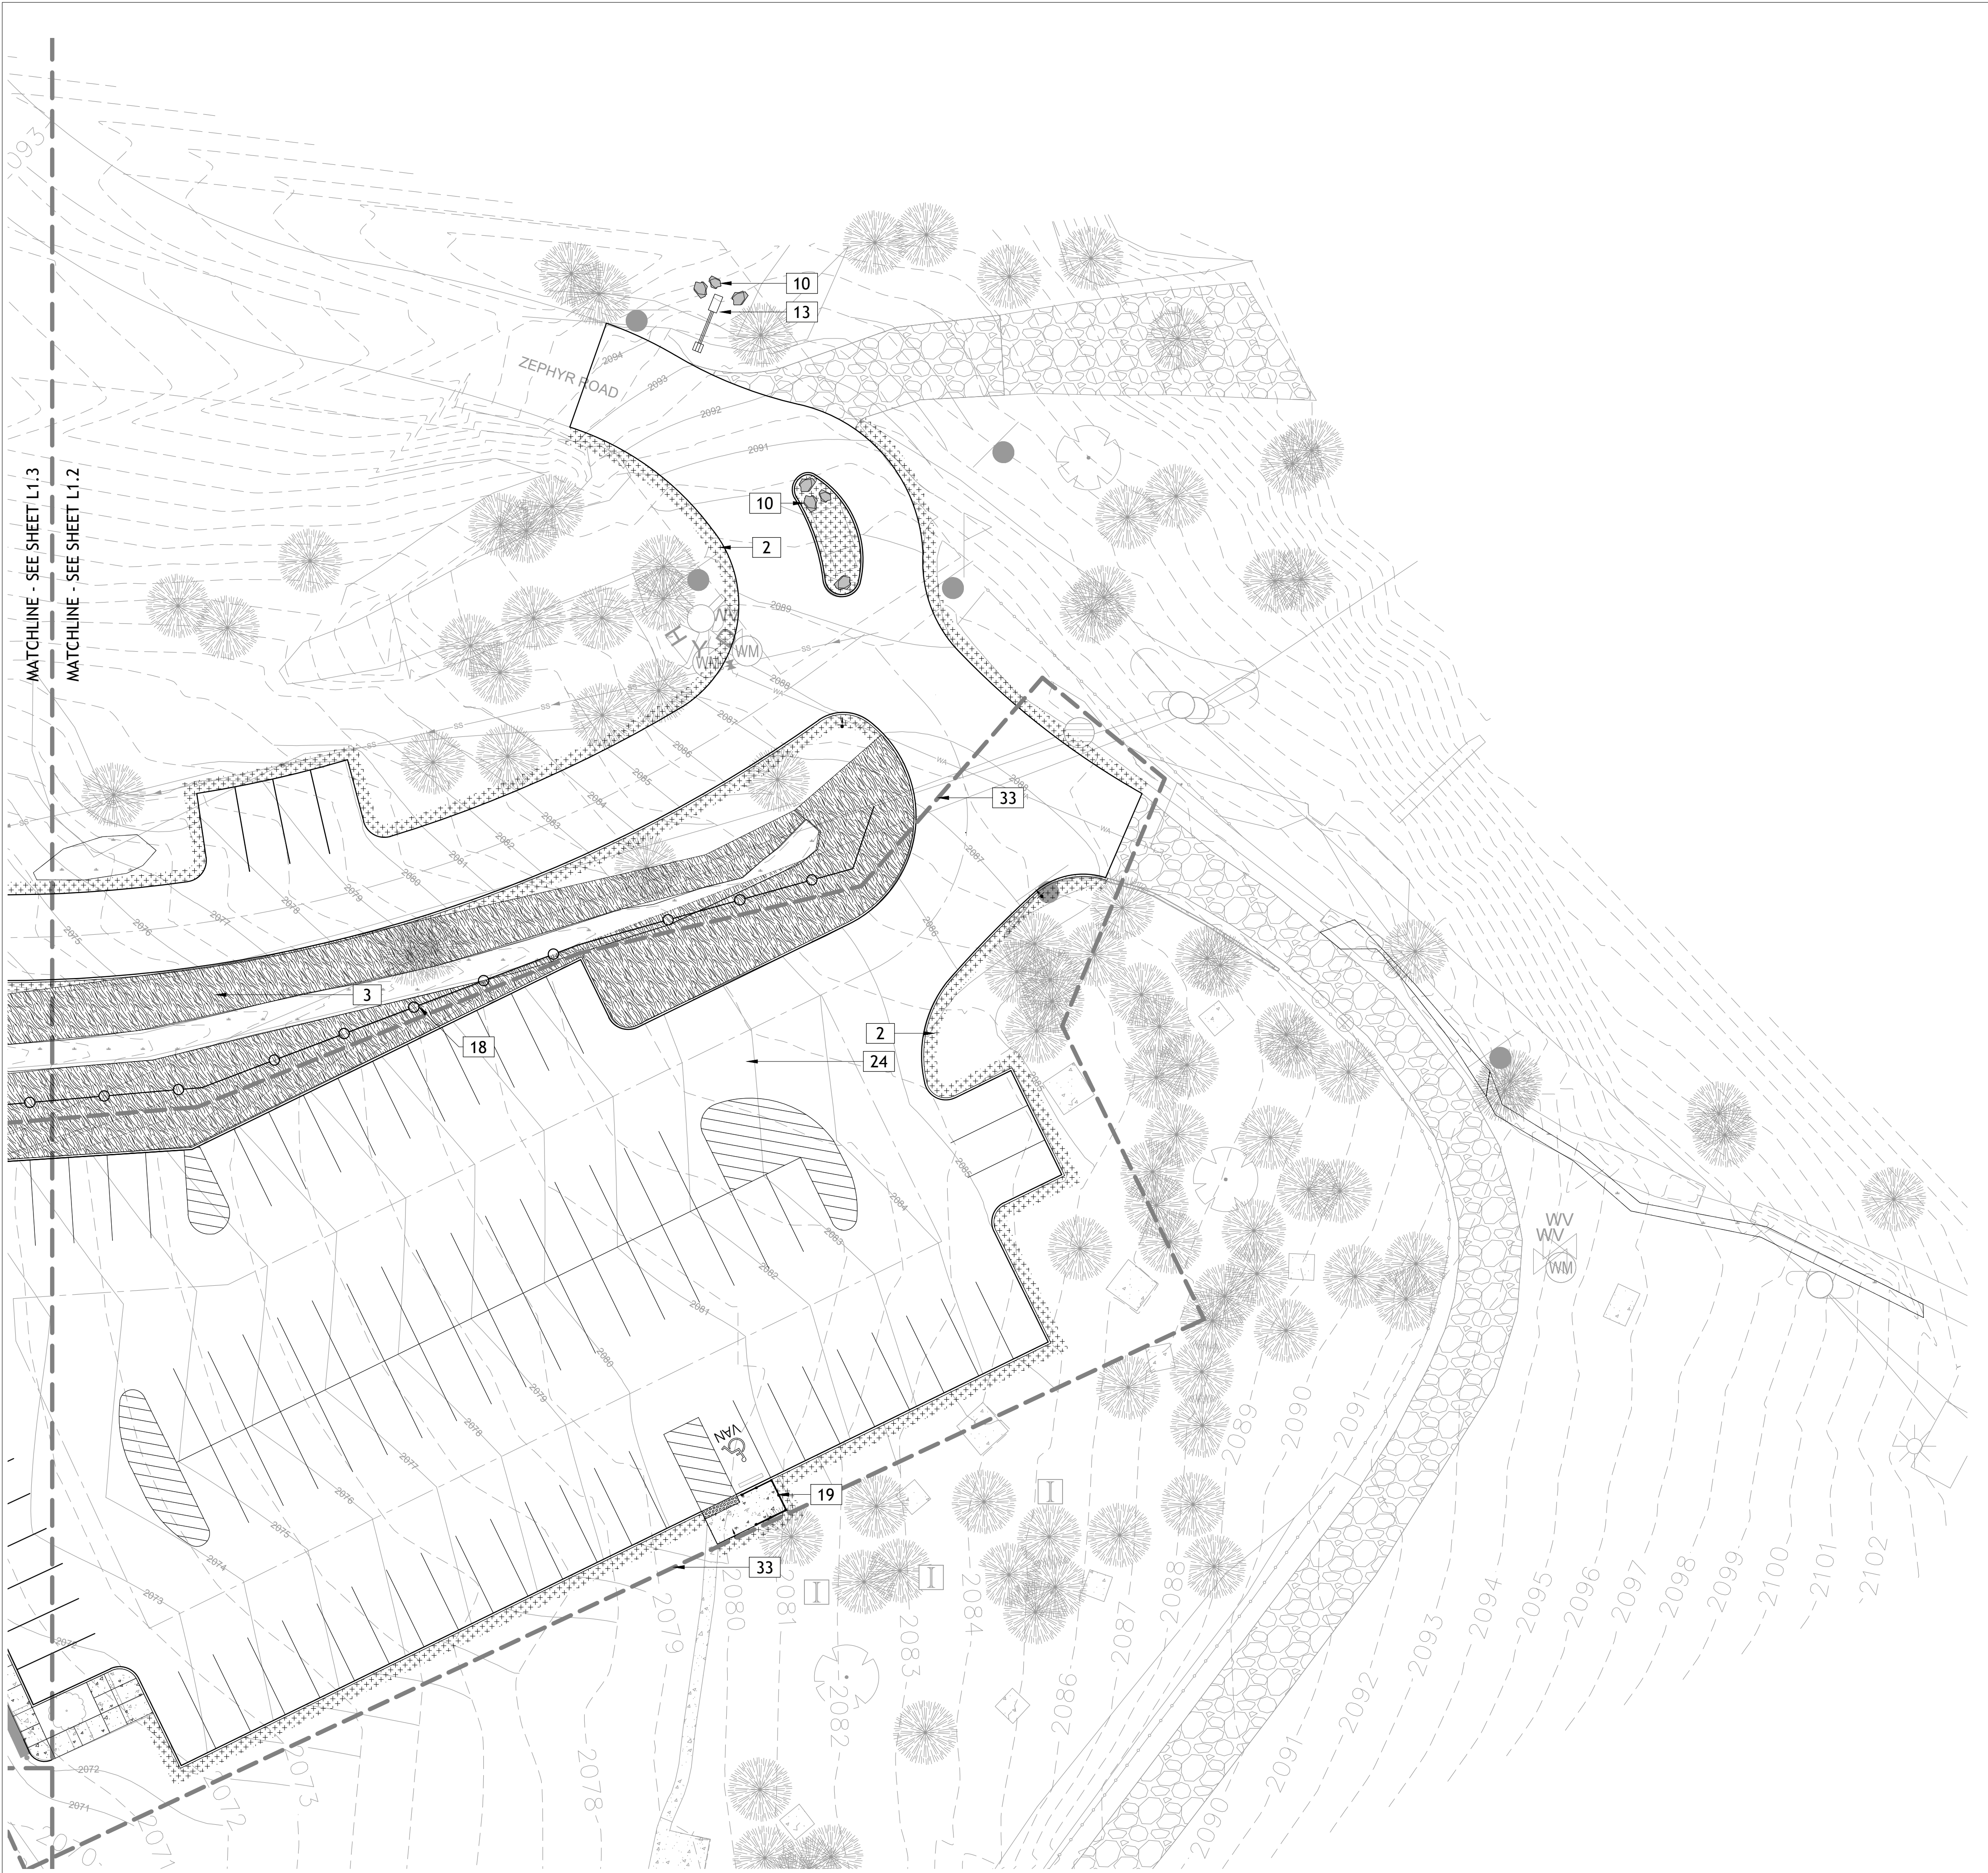

CONSTRUCTION NOTES

1. CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
2. CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
3. CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
4. CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
5. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
6. CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
7. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
8. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH THIS TYPE OF WORK.
9. IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
10. CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
11. CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

LANDSCAPE BOULDER NOTES

BOULDER SIZING GUIDE		
BOULDER SIZE	AVG. DIMENSION	% PERCENT OF TOTAL COUNT
2-MAN	18 TO 28 INCHES	10%
3-MAN	28 TO 36 INCHES	45%
4-MAN	36 TO 48 INCHES	45%

LANDSCAPE BOULDERS, TYP. VARIOUS SIZES, REFER TO BOULDER SIZING GUIDE. BOULDERS SHALL BE ANGULAR GRANITE WITH TEXTURED SURFACE. SUBMIT BOULDER SOURCE AND MINIMUM OF (3) SAMPLE PHOTOS TO LANDSCAPE ARCHITECT FOR APPROVAL. EXCAVATED OR BLASTED ROCK WILL NOT BE ALLOWED ON THIS PROJECT. SEE DETAILS #04 & 05/SHEET L5.0.

MATERIALS LEGEND



SYMBOL	DESCRIPTION
	1 NEW LANDSCAPE BEDS (12" DEPTH ONSITE TOPSOIL AMENDED W/ 40% IMPORTED COMPOST (BY VOLUME) OVERHEAD SPRAY IRRIGATION 2" DEPTH DARK FINES BARK MULCH)
	2 NEW DRYLAND HYDROSEED (NO IRRIGATION) - SEE PLANTING PLANS FOR SEED MIX
	3 WETLAND MITIGATION AREA - SEE PLANTING PLANS & SHORELINE IMPACT ASSESSMENT FOR ADDITIONAL INFORMATION (SHOWN FOR COORDINATION PURPOSES ONLY, MITIGATION BY OWNER, NOT-IN-CONTRACT)
	4 NEW CONCRETE FLATWORK - SEE CIVIL & ARCHITECTURAL SHEETS
	5 GRAVEL SURFACING (IMPORTED 6" DEPTH MINIMUM 5/8" - MINUS CRUSHED BASALT AGGREGATE SURFACING)
SYMBOL	DESCRIPTION
	10 GRANITE LANDSCAPE BOULDERS, 2-4 MAN TYPICAL - SEE BOULDER SIZING GUIDE SHEET L1.0 & DETAILS #07 & 08/SHEET L5.0
	11 NATURAL STONE RISERS, TYP. - SEE DETAIL #12/SHEET L5.0
	13 ENTRY MONUMENT SIGN - SEE DETAILS #01 & 02/SHEET L5.2
	14 NEW SMALL GROUP SHELTER - SEE DETAIL SHEETS A1.1 & S1.0 FOR ADDITIONAL INFORMATION
	15 NEW LARGE GROUP SHELTER - SEE DETAIL SHEETS A2.1 & S1.0 FOR ADDITIONAL INFORMATION
	16 NEW CXT RESTROOM BUILDING
	17 REMOVABLE BOLLARD, TYP. (MAGLIN MT8500-B2 SERIES BOLLARDS, 4.5IN. DIAMETER, H.S. STEEL TUBE CONSTRUCTION, COLOR SHALL BE YELLOW GLOSS)
	18 NEW 2-RAIL ROUND-RAIL CEDAR FENCE TO MATCH EXISTING ON-SITE FENCE, TYP.
	19 PORT-A-POTTY RESTROOM SCREEN - 3-SIDED 8FT. X 8FT. SQUARE REVAMP PANEL FENCE SYSTEM, PANEL DESIGN SHALL BE "BLADES" AS PROVIDED BY WWW.REVAMPPANELS.COM. COLOR SHALL BE DARK GREEN. (CONTRACTOR SHALL SUBMIT SHOP DRAWINGS & COLOR SAMPLE FOR APPROVAL)
	20 SEPARATION FENCE TO MATCH EXISTING TYPE & HEIGHT (CONTRACTOR TO FIELD VERIFY)
	21 NEW BARRIER GATE FOR ADJACENT NEIGHBOR'S ACCESS - SEE DETAIL #03/SHEET L5.2
	22 NEW PUMP STATION SURROUND & SCREENING (8FT. HT. BLACK VINYL-COATED CHAIN LINK FENCE BLACK PRIVACY SLATS ALL SIDES 10FT. CLEAR OPENING DOUBLE SWING GATES W/ PRIVACY SLATS PROVIDE OPTION FOR FUTURE PADLOCK (BY OWNER))
	23 BOULDER RETAINING WALLS - SEE CIVIL SHEETS & DETAILS #09 & 10/SHEET L5.0 FOR ADDITIONAL INFORMATION
	24 NEW ASPHALT PAVING & CURBS - SEE CIVIL SHEETS
	25 NEW CONCRETE ABUTMENT - SEE DETAILS #05/SHEET L5.2 FOR ADDITIONAL INFORMATION
	26 NEW DOCK (NOT-IN-CONTRACT) - SHOWN FOR INFORMATIONAL PURPOSES ONLY
	27 STANDARD COUNTY INFORMATION KIOSK - SEE DETAIL #04/SHEET L5.2
	28 NEW EXTERIOR SHOWER & FOOT WASH, TYP (2) - 8IN. DIAMETER ADA COMPLIANT OUTDOOR SHOWER & FOOTWASH W/ GRAB BARS, MANUFACTURED BY WSF WILLOUGHBY STAINLESS FOUNTAINS. MODEL NUMBER WODS-ADA STAINLESS STEEL SERIES TYPE 316 STAINLESS STEEL, WITH 4 BOLT MOUNTING KIT, ONE FOUNTAIN SHALL HAVE A RECESSED HOSE BIBB W/LOCK DOOR.
	29 FIRE EXTINGUISHERS SHALL BE PROVIDED AND INSTALLED BY CONTRACTOR FOR ALL SHADE STRUCTURES (3 TOTAL)
	33 ALTERNATE NO. #01 PARKING LOT LIMIT LINE

* ALL QUANTITIES PROVIDED SHALL BE CONFIRMED BY CONTRACTOR AND ARE SHOWN FOR REFERENCE ONLY. IN THE CASE OF A DISCREPANCY BETWEEN THE SCHEDULE AND PLAN, THE PLAN LOCATION(S) SHALL DICTATE QUANTITY.*

B W A

BERNARDO | WILLS
ARCHITECTS PC

UNDERGROUND SERVICE ALERT
ONE-CALL NUMBER
811 OR
(800)342-1585
CALL TWO BUSINESS DAYS BEFORE YOU DIG

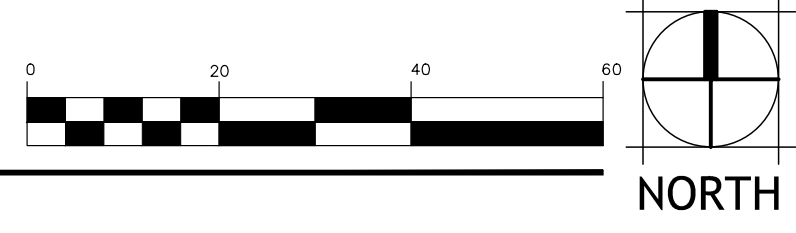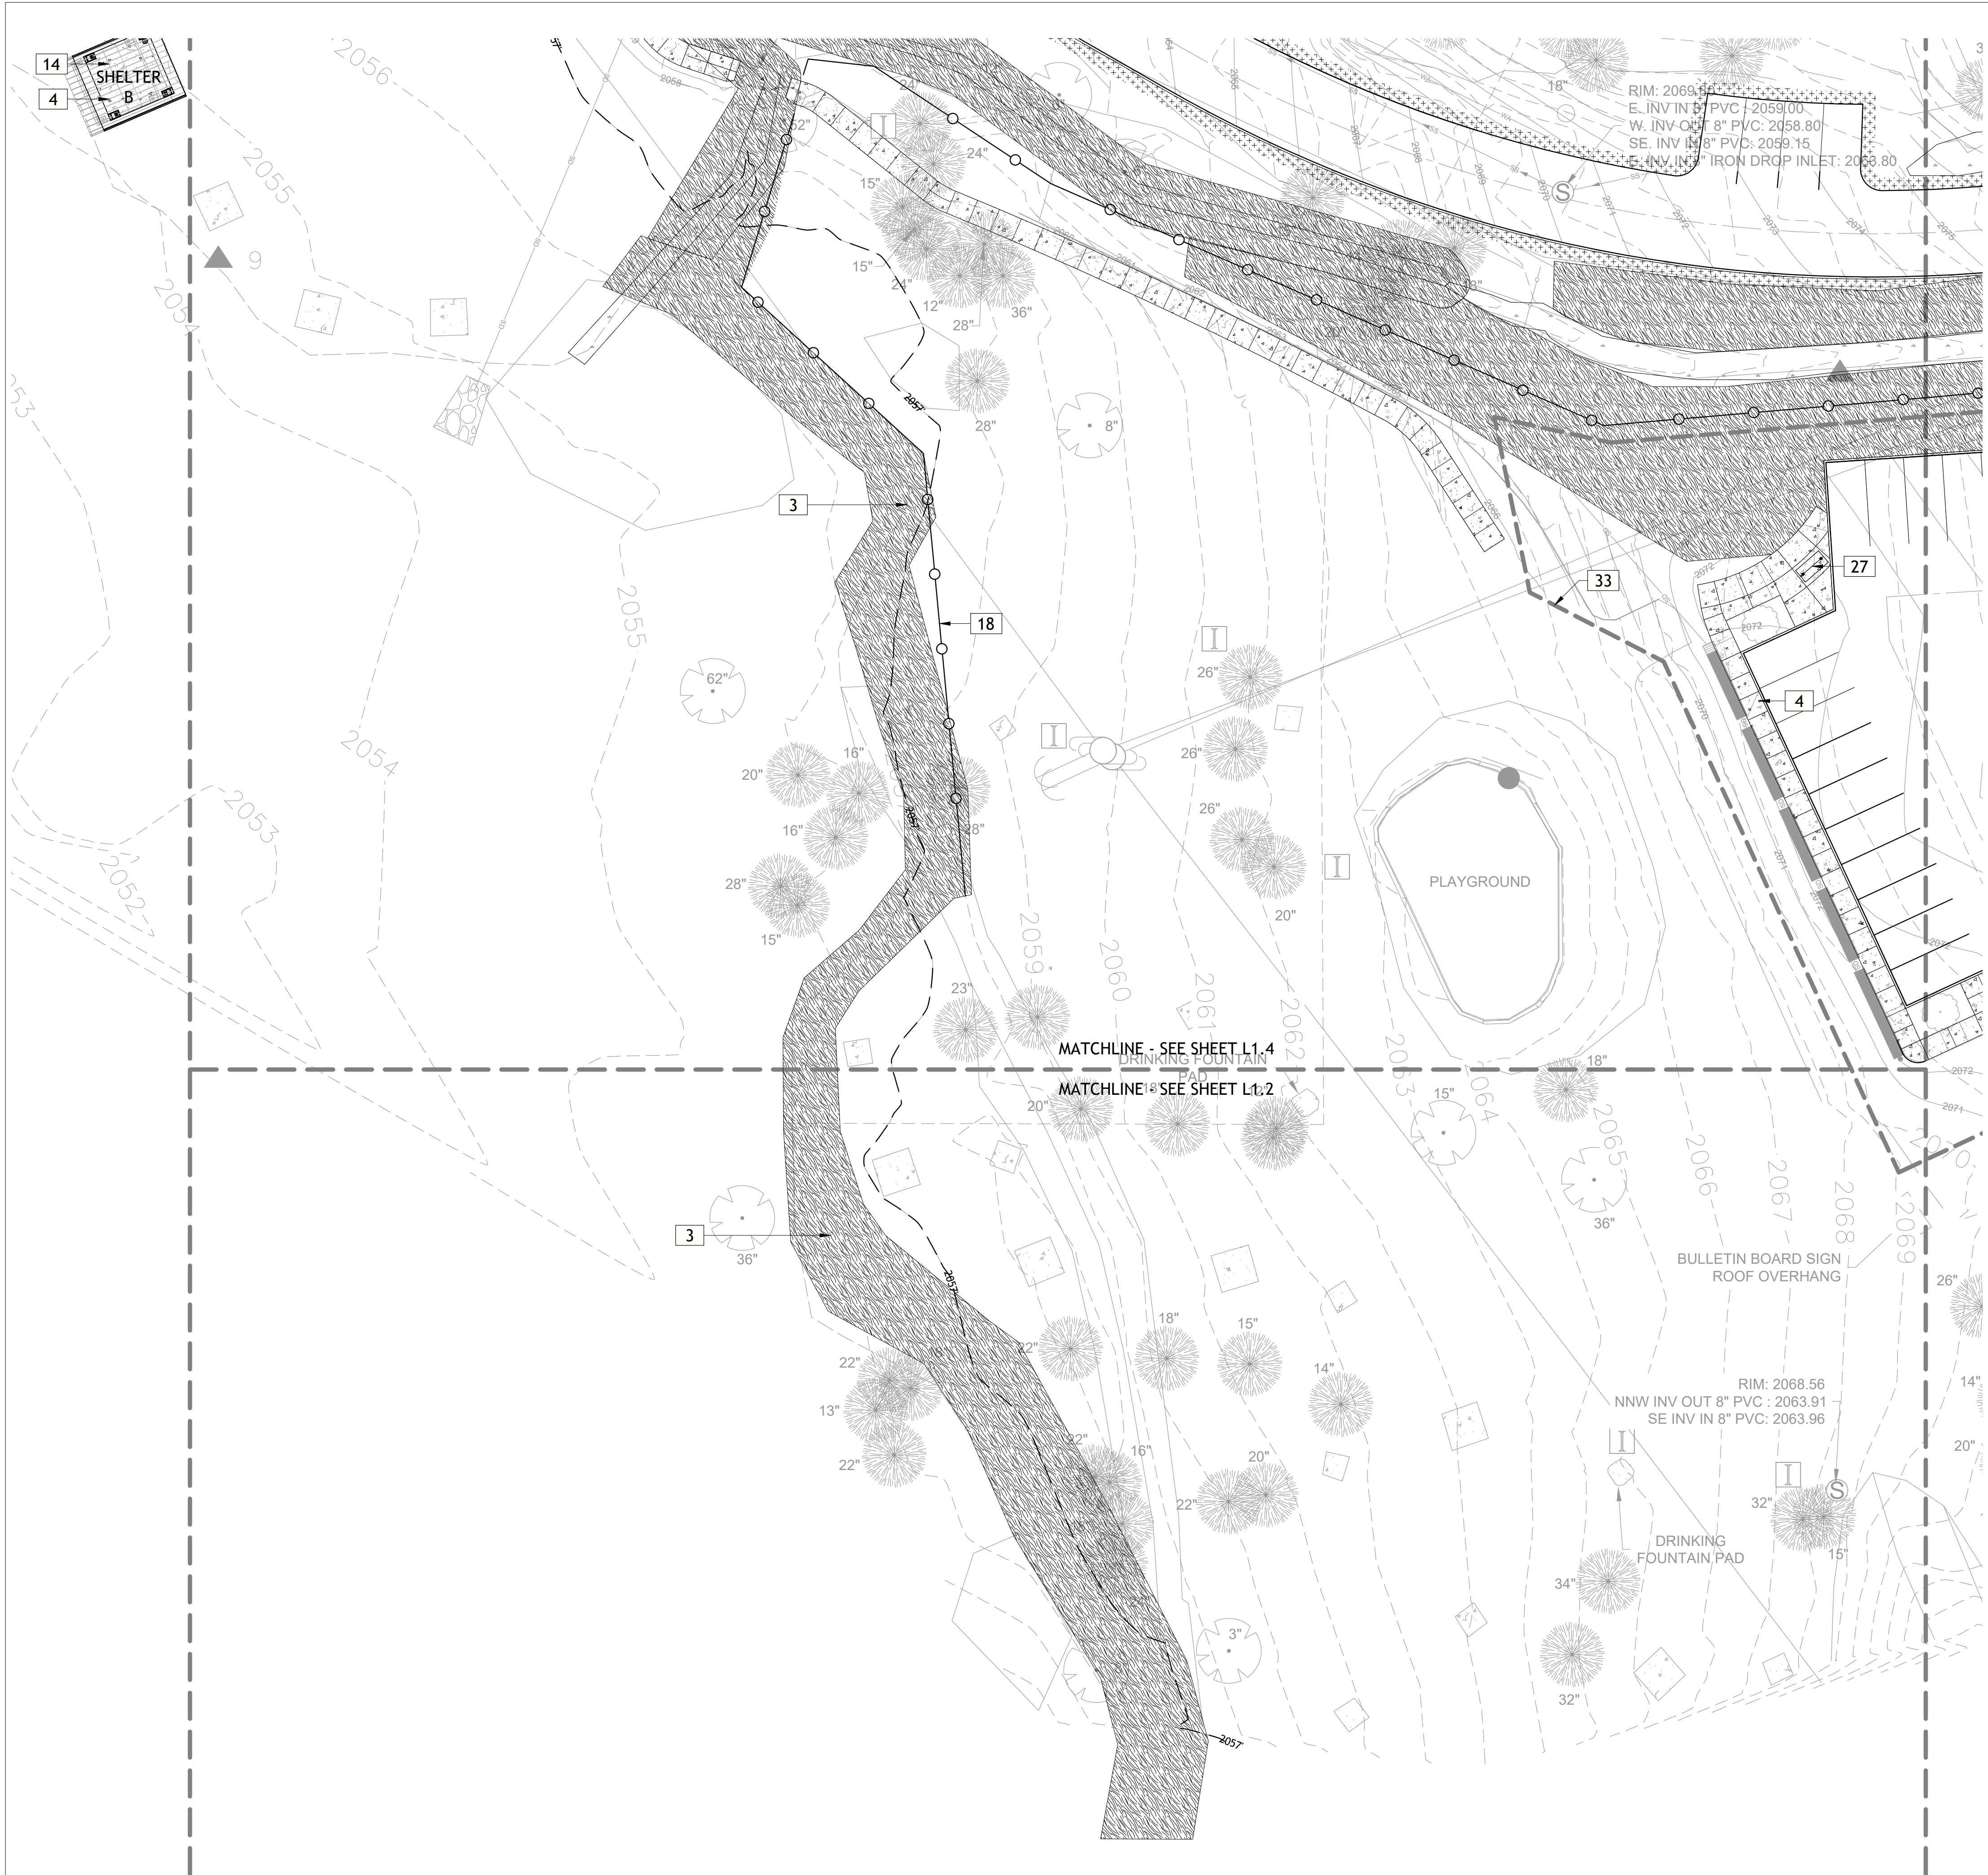

CONSTRUCTION NOTES

LANDSCAPE BOULDER NOTES

MATERIALS LEGEND

UNDERGROUND SERVICE ALERT ONE-CALL NUMBER 811 OR (800)342-1585 CALL TWO BUSINESS DAYS BEFORE YOU DIG